

The Manak is Esthetica's four-motor electric treatment table, defined by its clean straight-line geometry and elegant, minimal aesthetic. Electronic adjustments for the backrest, legrest, and height give therapists precise control across every treatment, while the open shelf base design keeps the treatment room feeling uncluttered and contemporary. A specially crafted top design allows therapists to work in close proximity to the client's face, making the Manak particularly well-suited to facial and head treatments.



KEY FEATURES



Straight-Line Geometric Design

The Manak's clean, straight-line aesthetic sets it apart from conventional spa tables — its open shelf base and minimal form bring a contemporary elegance to any treatment room without compromising on structural integrity or performance.

Electronic Backrest & Legrest

Independent electronic adjustments for the backrest and legrest give therapists precise control over client positioning, ensuring the table can be configured quickly and accurately for every treatment on the spa menu.

Face-Access Top Design

The Manak's specially crafted top cushion design allows therapists to position themselves closer to the client's face than a standard table allows, making it particularly suited to facial treatments, scalp massage, and head therapies.

Veridura Phthalate-Free Upholstery

The Manak is available in Veridura Phthalate-Free Upholstery, designed for professional spa environments, offering a safer surface for both clients and therapists. It resists stains, acetone, and disinfectants, withstands frequent cleaning, and ensures durable, fire- and abrasion-resistant performance.

FEATURES

Backrest	Electronically Adjustable
Legrest	Electronically Adjustable
Height	Electronically Adjustable
Foam Cushion	115 mm mixed layer of different densities for comfortable massage experience
Optional	IVC Heating Technology

TECHNICAL SPECIFICATIONS

Length	2055 mm / 80.9 in
Width	790 mm / 31.1 in
Minimum height	710 mm / 27.9 in
Maximum height	915 mm / 36 in

ELECTRICAL PARAMETERS

Power in (Mains Power Supply)	100–240V, 50–60Hz, 3A
IPX Rating	IPX6
Operating Temperature	10–40°C
Shock Protection:	Class I

BASE & FRAME

Base	Powder-coated mild steel frame
Safe Working Load	250 kgs
Load Bearing capacity	180 kgs

SAFETY STANDARDS

General Safety Standards	IEC 60601-1
EMI/EMC	IEC 60601-2




UPHOLSTERY

Type	Veridura Phthalate-Free Upholstery
Thickness	1 mm
Tensile Strength	ISO 1421, 869.22 N/ 5 cm
Colour Options	Cream, Beige, Mouse Grey, Brown, Charcoal Grey
Weight	726.7 g / sqmt
Abrasion	ISO 5470-2 = 2,00,000 cycles / min

WARRANTY


Motors	2 years
Frame	5 years

TECHNICAL DRAWINGS

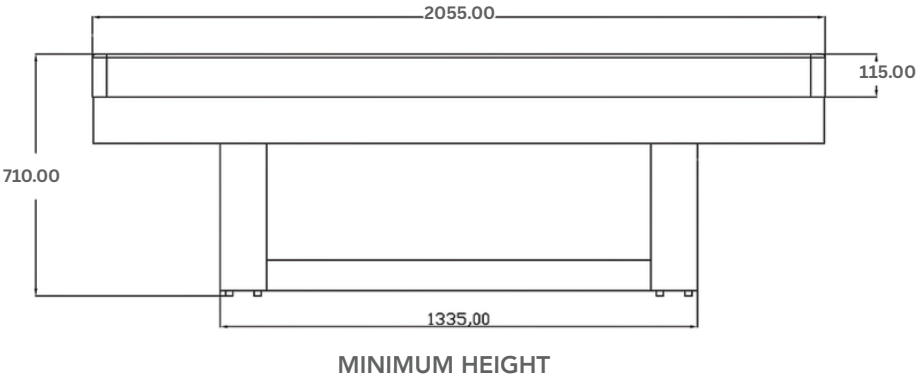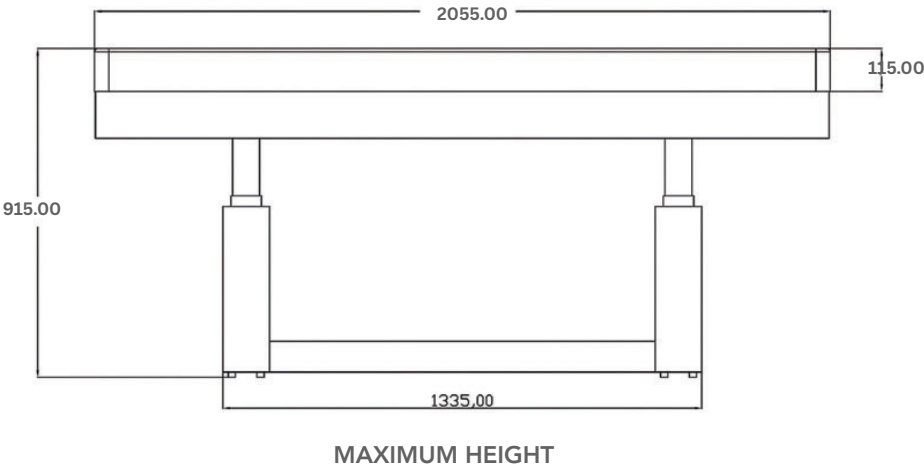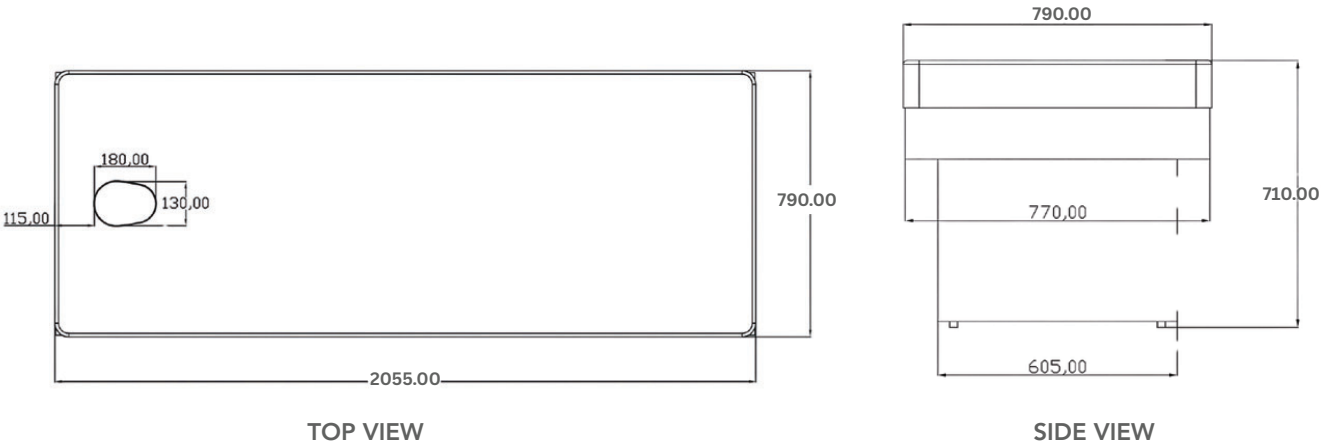


ALL DIMENSIONS ARE IN MM

WOOD FINISH OPTIONS

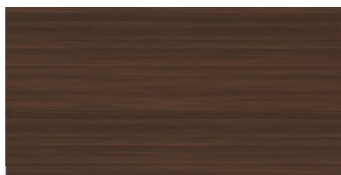

American Oak
Dark Walnut




American Oak
Wenge



American Oak
Yellow Teak




American Oak
White Wash Finish



American Oak
Water Base



American Oak
PU Finish



American Oak
Open Pore Black




American Oak
Open Pore White

VERIDURA PHTHALATE-FREE UPHOLSTERY



Cream




Beige



Mouse Grey



Brown



Charcoal Grey



Phthalate-Free



Fire Retardant



Oil Resistant



Alcohol Resistant



Ultra Soft



Stain Resistant



Anti Bacterial



Eco - Friendly